



9334-000-BBB0-CCC0



9334-111-BBB0-CCC0

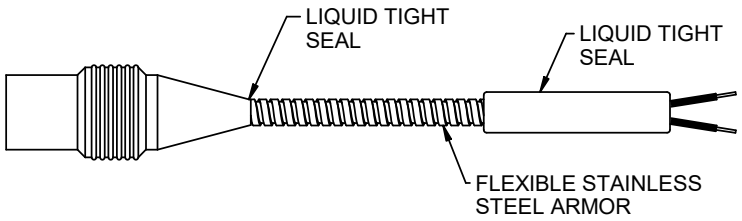

9334-211-BBB0-CCC0



PIN A - SIGNAL (RED)
PIN B - GROUND (BLACK)

SPECIFICATIONS

9334-000-BBB0-CCC0	No connectors, 0.15” diameter FEP jacketed cable with twisted, shielded pair wires. Cable rated for -50°C to +121°C
9334-111-BBB0-CCC0	Connector, two socket contacts, with integral, molded splash proof boot. 0.15" diameter FEP jacketed cable with twisted, shielded pair wires. Connector and cable rated for -50°C to +121°C
9334-211-BBB0-CCC0	MS3106A-10SL-4S connector, two socket contacts, with cable strain relief. 0.15" diameter FEP jacketed cable with twisted, shielded pair wires. Connector rated for -55°C to +125°C Cable rated for -50°C to +121°C

PART NUMBERING

MODEL 9334 – 211 – 0095 - 0100
(A = 211, B = 0095, C = 0100)

A = 2 1 1 = MS STYLE CONNECTOR

B = 0 0 9 5 = ARMOR LENGTH
9.5 meter (31.2 ft)
+0.25m/-0.00m (+.82 ft/-0 ft)

C = 0 1 0 0 = CABLE LENGTH
10.0 meter (32.8 ft)
+0.25m/-0.00m (+.82 ft/-0 ft)

MATERIAL:
FINISH:
THIS DOCUMENT AND ALL INFORMATION HEREON IS THE PROPERTY OF *METRIX INSTRUMENT CO.* APPROVAL MUST BE OBTAINED BEFORE IT IS REPRODUCED OR INFORMATION HEREON IS ISSUED TO A THIRD PARTY. THE DOCUMENT MUST BE RETURNED UPON REQUEST.
UNLESS OTHERWISE SPECIFIED, DIMESIONS ARE IN INCHES. ALL CORNERS BROKEN TO .010 MIN. RADIUS AND TOLERANCES ARE:
FRACTIONS: ± 1/64 DECIMALS: .XX ± .01 XX ± .005
ANGLES: ± 1°
SURFACE FINISH 64

		APPROVALS	DATE
		DRAWN BY:	
		S. Smith	04/29/02
		CHECKED BY:	
		S. Smith	03/22/02
	ST5484E	APPROVED BY:	
	IT6810	R.L. Morrison	05/22/02
	SA6250		
	SA6200		
NEXT ASSY	USED ON		
APPLICATION		DO NOT SCALE DRAWING	

METRIX HOUSTON, TEXAS U.S.A.

SPECIFICATIONS,CABLE ARMORED, ACCELEROMETER

SIZE B | DRAWING NO.: 9320 | REV C
SCALE: 1 : 1 | SHEET 1 OF 1