10000 PROXIMITY PROBES & CABLES FOR 7200 SERIES (11 MM)

Datasheet

OVERVIEW

For longer range applications to 160 mils: Probes, cables and driv-ers or transmitters are combined within a unique series and not mixed with other series (interchangeable with 7200 series and not others). The lengths of the probes and extension cables must combine for a system length of 5 or 9 meters.

All proximity probes/transducers have third party approvals, comply with API 670 specifications, and feature ProxMatch™ component coding and are ATEX approved.




PROXIMITY PROBES & EXTENSION CABLES SELECTION

1. Select a probe to suit the mechanical requirements of the machine and mates with the same series extension cable and driver, or transmitter.
2. Pick an Extension Cable from SAME SERIES as probe and electronics.
3. Given the probe length, pick a cable length so the sum of probe and cable add up to the system length.
4. Choose with or without armor.

WEIGHT AND DIMENSIONS


REVERSE MOUNT PROBE

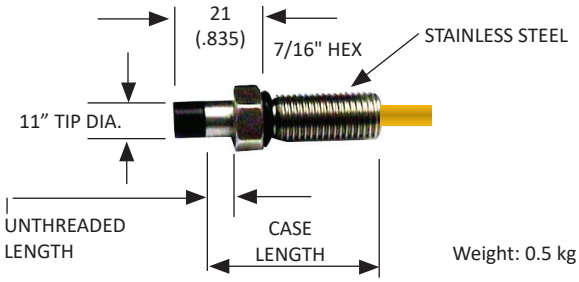

Weight: 0.5 kg [1lb]

STANDARD PROBE


Weight:
0.4 kg [0.8 lb], unarmored 0.5 kg [1 lb], armored

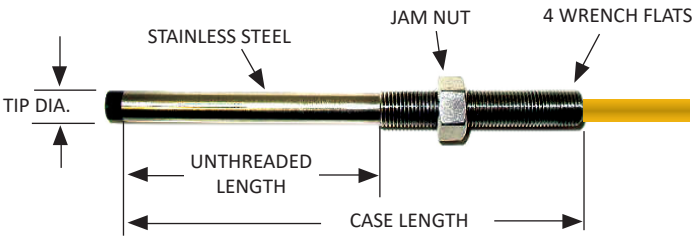


Dimensions in mm [inches]

SPECIFICATIONS

Probe Tip Material	Ryton
Probe Case Material	Series 300 SS for forward mount, smooth case and reverse mount probes
Probe Cable Specs	Coaxial cable with Tefzel insulation for maximum abrasion resistance with ProxMatch color & alphanumeric coding specific to a series and system length.
Cable Impedance	12.2 Ω for a 0.5m 10000 (7200) Probe Series -11 mm 12.8 Ω for a 1m 10000 (7200) Probe Series -11 mm
Connector to Connector Torque	Hex connector to hex connector- finger tight and 1/8 turn with wrenches. Hex connector to "click type" connector- finger tight plus 1/8 turn with wrench & pliers
Tensile Strength	Hex connector to hex connector- finger tight and 1/8 turn with wrenches. Hex connector to "click type" connector- finger tight plus 1/8 turn with wrench & pliers
Probe / Cable Armor	Series 300 SS, flexible, connected to probe body with case internal thread.
Minimum Bend Radius	1 inch without armor
Target Material	4140 steel (standard)
Probe & Extension Cable Temperature Range	-40°C to +177°C (-40°F to +351°F)
Probe Pressure	Standard probe design includes seal between probe tip and case and is not pressure tested before shipment. If pressures are present, contact the factory for possible high pressure probe designs.
Relative Humidity	100% condensing but not submersible and with connectors properly protected.
Connector Material	Gold plated brass hex connectors

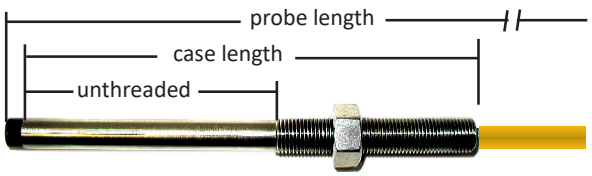

CABLE

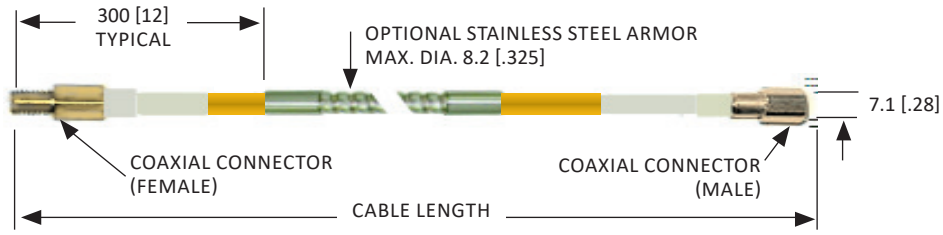


Weights:
0.5 kg [1 lb] for 5 m, unarmored
0.7 kg [1.5 lbs] for 5 m, armored
0.7 kg [1.5 lbs] for 9 m, unarmored
1.0 kg [2.2 lbs] for 9 m, armored

ORDERING INFORMATION

STANDARD PROXIMITY PROBE 100XX-AA-BB-CC-02						
Model No.	**Tip Diameter**	**Case Threads**	**Unthreaded Length AA**	**Case Length BB**	**Probe Length CC**	**Armor**
10037	11 mm	1/2”-20	Standard 00= 0.0 in. Increments of 05= 0.5 in. Maximum= case length minus 1.0 in.	Min: 10=1.0 in Delta: 05=.05 in Std: 30=3.0 in Max: 95=9.5 in	05 = 0.5 m ± 0.05 m 10 = 1.0 m ± 0.1 m	No
10038						Yes
10039						
		M14-1.5	Standard 00= 0 mm Increments of 01= 10 mm Maximum= case length minus 20 mm.	Min: 02=20 mm Delta: 01=10 mm Std: 07=70 mm Max: 25=250 mm		No
10040						Yes
		3/8”-24	02= 0.2 in.	12= 1.2 in.		No
10042*		M10-1.0	05= 5 mm.	30= 30 mm.		

* Reverse Mount



Use a standard straight-through threaded probe or the reverse mounted probe and “stinger” depending on availability of the target.

Model 5499
IS REQUIRED
for mounting reverse mount probes



EXTENSION CABLE FOR 7200 SERIES 9282-AAA-BB
Cable length AAA
040= 4.0 m
045= 4.5 m
080= 8.0 m
085= 8.5 m
Armor BB
00 = NO
01 = YES

Example transducer configuration
Given: A 9 meter system, 3.0 in. case length 1/2-20 probe, 1/2 meter long, 0 in. unthreaded, no armor on probe, armored cable. Use:

- Probe: 10037-00-30-05-02
- Extension cable: 9282-085-01

SAFETY INTEGRITY LEVEL

SIL is a method or measurement unit to determine the reliability of electrical, electronic and programmable systems. The purpose of the SIL certification is to measure safety system performance and the likelihood of failure. Achieving SIL certification, based on the IEC61508 Functional Safety Standard, signifies that the product has been thoroughly assessed and is a reliable electronic device ready to use across a wide range of industries.

Metrix DPS products have been thoroughly evaluated by an independent third party agency on the basis of IEC61508 Functional Safety standards to obtain SIL certification.

Note: Metrix is continuously improving our products. Please refer to our website to download the latest version of this document.

© 2026, Metrix Instrument Company, L.P. All rights reserved.